

LOW PROFILE LIFT TABLE | With ramp

Static electro-hydraulic lift tables are specially made for installation without a pit. Lowered height is only 85 mm. Built with solid steel plates for highest strength and reliability. Separate hydraulic power pack (IP54) which is positioned next to the lift table. The moveable ramp is included. Cable for 3-phase connection 380V/16 Ah. Confirms to EN1570-1 and ANSI/ASME-norms.



SL1001

LOW PROFILE LIFT TABLE | U-shaped


Static electro-hydraulic U-shaped lift table are specially made for pallet handling together with normal hand pallet truck. Installation do not need ramp or pit. Lowered height is only 85 mm. Built with solid steel plates for highest strength and reliability. Separate hydraulic power pack (IP54) which is positioned next to the lift table. Cable for 3-phase connection 380V/16 Ah. Confirms to EN1570-1 and ANSI/ASME-norms. Inner length of fork 1080 mm.



SU1001



SU1001

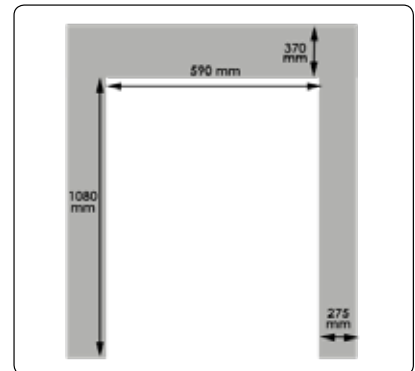

Measure sketch SU1001.

TECHNICAL INFORMATION					
Art.no	SL1001	SL1003	SL1502	SU1001	SU1500
Type	Low profile	Low profile	Low profile	U-shaped	U-shaped
Capacity (kg)	1000	1000	1500	1000	1500
Table area (LxW) (mm)	1450x1140	1450x800	1600x1000	1450x1140	1600x1200
Base frame size (LxW) (mm)	1076x1330	1736x1330	1430x936	1076x1330	1430x1136
Stroke Length (mm)	775	775	775	775	755
Weight (kg)	357	357	401	280	380
Lifting height, min-max (mm)	85-860	85-860	105-870	85-860	105-860
Lifting time to max height (s)	18	15	20	15	20
Lifting motor	380V/50HZ 1,1 kW	380V/50HZ 1,1 kW	380V/50HZ 1,5 kW	380V/50HZ 1,1 kW	380V/50HZ 1,5 kW
Width between forks/forks (mm)	-	-	-	590/275	590/305
Price					